


Exhibit CS-BW-94

*Specifications and Photos of
Fence Screening Material*

600 SERIES


COMMERCIAL OPEN - OPEN MESH POLY

Elevation View

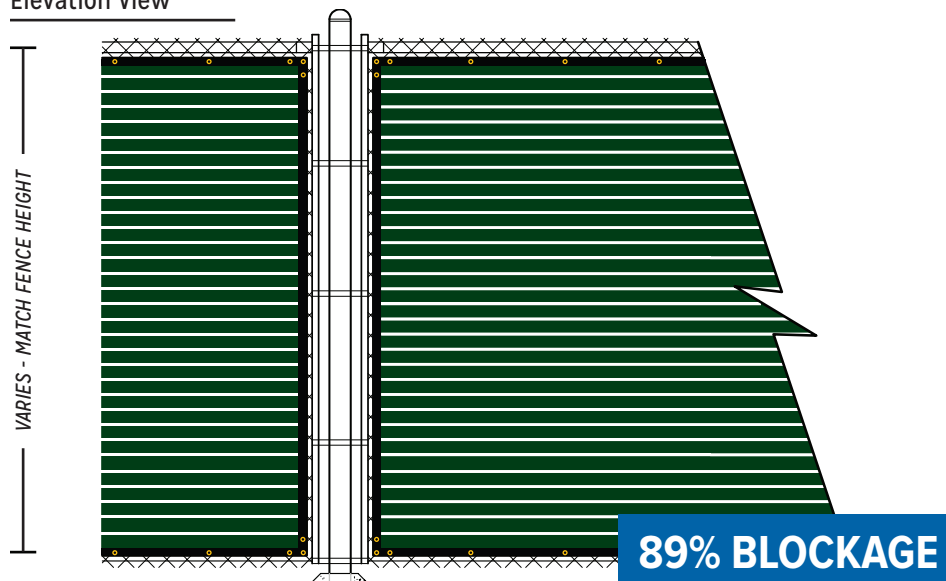

- FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
- 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

Perspective View

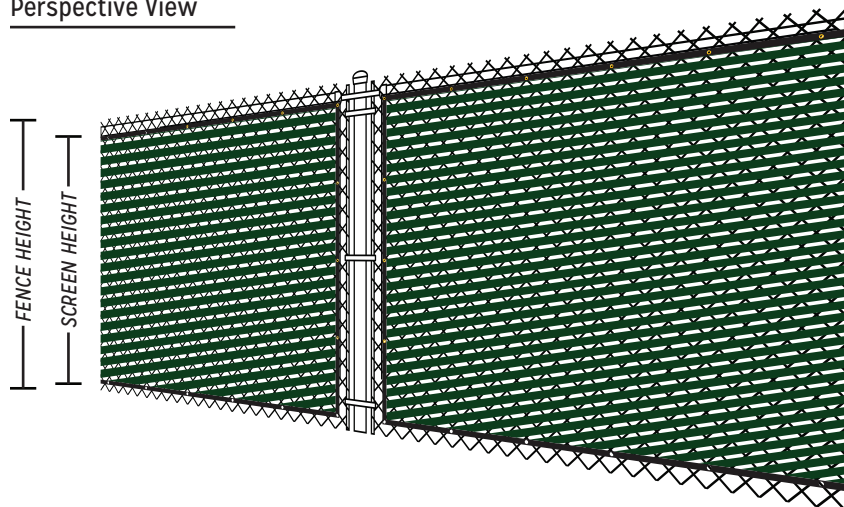


FENCESCREEN SPECIFICATIONS

PROPERTIES	RESULTS
Material / Fiber	100% Polypropylene
Material Weight	200 g/m ²
Construction	30 x 16 weave lath-leno Closed Mesh
Grab Tensile Strength	420 x 256 lbs
Burst Strength	469 psi
Hems	3 ply reinforced with polypropylene binding
Shade Percentage	89%

Attachment Enlargement

ATTACHMENT POINTS EVERY 24"
TIPLE GROMMETED CORNERS

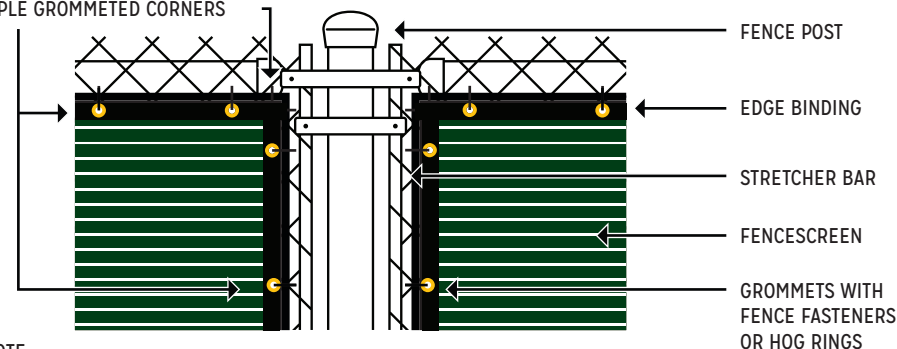

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATIONS.
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZES.

Available Colors

Dark Green, Black.



Material Composition

Open Mesh Poly is made from Knitted Polypropylene with UV additives.

Drawings not to scale.

Detail Name:
600 Series Commercial Air

Drawing Number:
FSPS600



PHONE: 1.888.313.6313

www.FenceScreen.com



