

Exhibit LH-3 Generator Specifications

# 30RE0ZK

30 kW Generator



**KOHLER**<sup>®</sup>  
IN POWER. SINCE 1920.

# LEGENDARY KOHLER QUALITY

## FOR SMALL SPACES

### COMPACT FOOTPRINT

Our 76.5" x 32" rectangular footprint is specially designed for cell tower site applications.

### QUIET PERFORMANCE

Our sound enclosure delivers a sound performance of 65 dBA— which is among the quietest available.

### RELIABLE POWER


Our direct engine/alternator design eliminates the possibility of generator failure due to improper adjustment or belt breakdowns.

### SINGLE-SIDE SERVICE


Maintenance is easy. All frequently serviced touch points are located on a single side and accessible by an easy-to-remove lift off door.

### 30RE0ZK

Front View

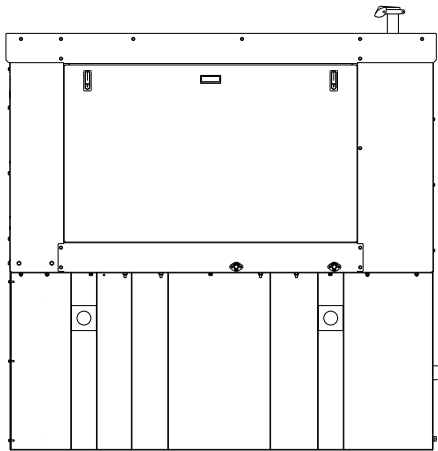

Top View

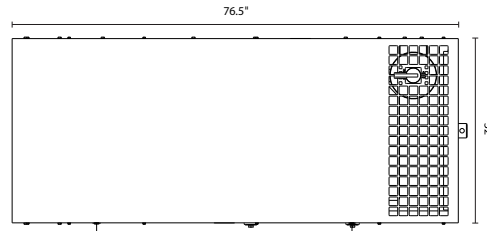

MODEL	30RE0ZK
FUEL TYPE	Diesel
ENGINE MAKER	Kohler KDI
OPERATING SPEED (rpm)	1800
CONTROLLER	Kohler Decision-Maker 3000
VOLTAGE	120/240 1 Phase
TANK GALLON/48 HRS @ FULL LOAD	203
TANK*	Standard, Double Wall
OVERALL DIMENSIONS L x W x H in	76.5 x 32.0 x 47.0
WEIGHT lbs	1130
PEOPLESOFT NUMBER	21099077

\*Alternative tank sizes, state tanks and 3 phase models available.